



Simple Set Security



Simple Set Security is a terminology and philosophy adopted by ADE to address the ever-increasing complexity of security alarm systems. The Simple Set reader is a neat, compact and stylish product that can be installed discreetly to blend in with the considered aesthetics of a domestic residence. The unit obtains power from the local control panel and allows the alarm system to be SET/UNSET by the single and deliberate presentation of an ergonomically designed Proximity Keyfob – allowing 100% accuracy in the operation irrespective of the user.

No batteries required

All Keyfobs operate without batteries and take their power inductively from the reader, when they are placed in close proximity.

Multiple user

Up to 8 individually coded Keyfobs can be programmed, allowing for multiple user access where needed.

No master keyfob

The system is programmed without the need of a Master Keyfob and allows for complete program flexibility from any user fob, without impairing security of the system.

LED indicators

The reader contains multiple LED indications to aid programming and exhibit full indication as would be seen on a G3 Control Panel or associated keypad.


Simple Set Features



CAN BE HARDWIRED TO ANY CONTROL PANEL WITH ACCENTA KEYPAD INTERFACE

- On board sounder to assist with programming and mimic panel tones
- Standard industry cabling, interlinks Panel to Reader
- Full compatibility with all G3 and Accenta panels that have an external Keypad interface
- Tampered against unauthorised access
- Master Override facility
- Complete with 2 programmed keyfobs

STYLED ROBUST ABS ENCLOSURE

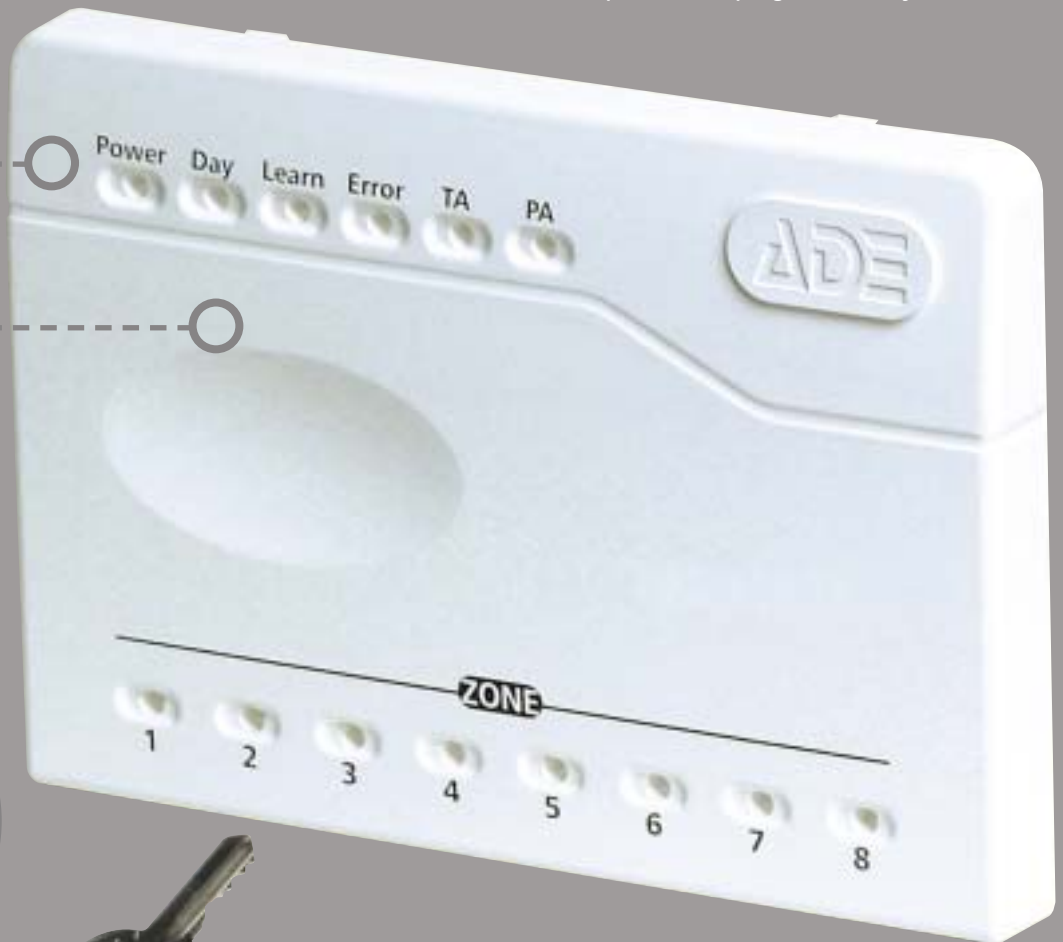

STYLED KEYFOB IN ROBUST POLYCARBONATE




READER COIL TO ENERGISE
AND POWER KEYFOB

ONBOARD LED INDICATION
TO ASSIST WITH
PROGRAMMING

MULTIPLE CABLE
ENTRIES
ALLOWING FOR
EASIER
INSTALLATIONS

RELAY OUTPUT
FOR KEYSWITCH
INPUT TO
COMPATIBLE
PANELS

FULL LED INDICATION TO
MIMIC CONTROL PANEL

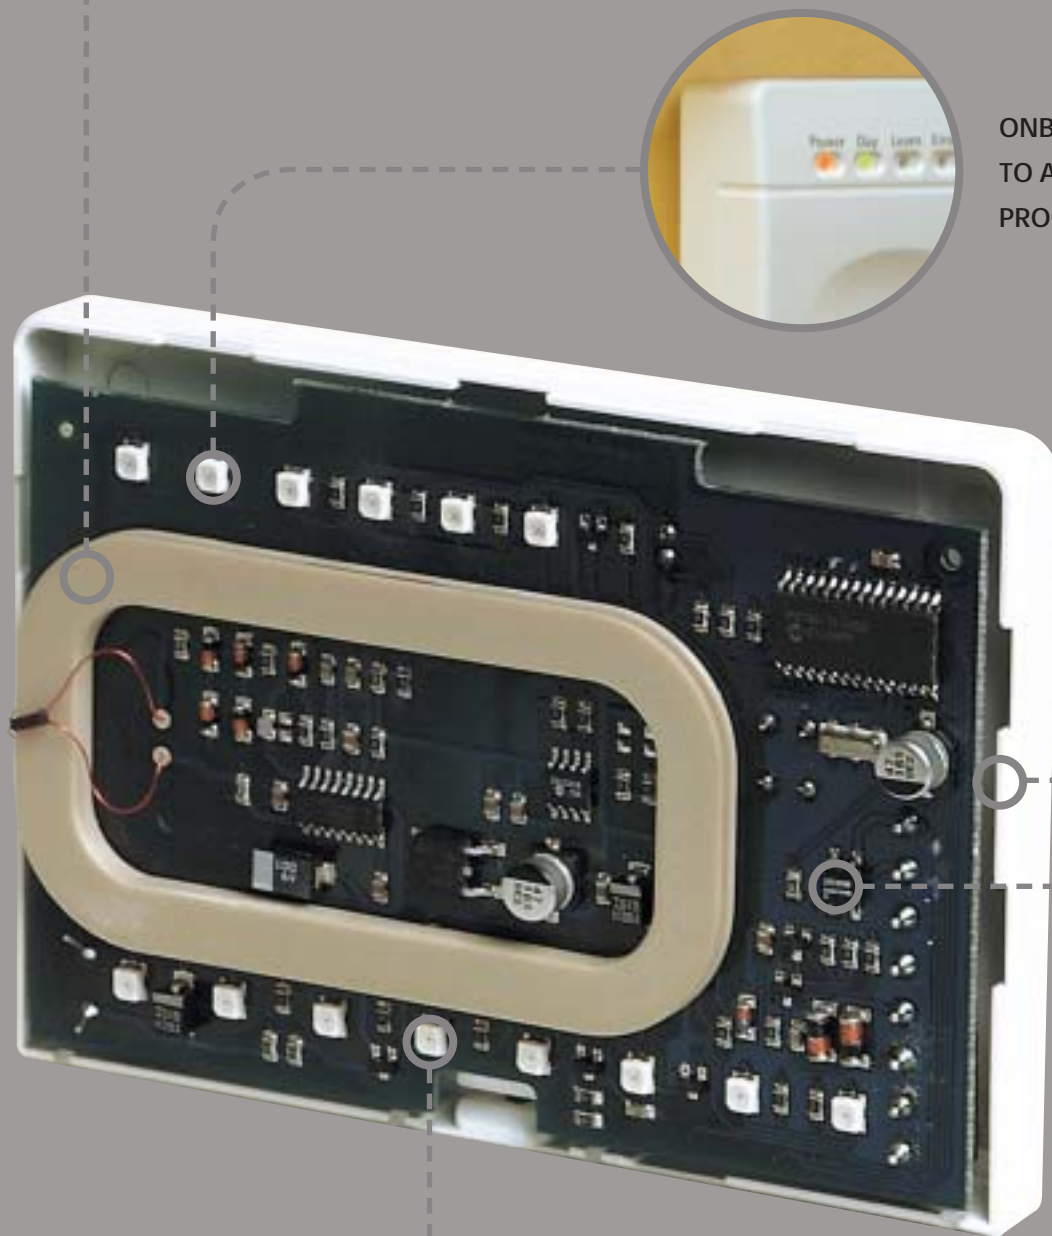





Simple Set Specification




Simple Set Security – A Proximity based system that allow ALL Control Panels in the G3 Range to be SET and UNSET by the presentation of a handheld keyfob to a wall mounted Reader.

READER		KEYFOB
Size	83 x 116 x 22mm	59mm length, 19mm width (maximum dimensions)
Weight	109g approx.	7g approx
Power supply	Nominal 13.8V 9from Panel) @ 100mA maximum	
Relay contacts	100mA maximum current capability	
Reading distance	Between 20 and 40mm	
Acknowledgement times	500mS maximum	

	LIST NUMBER	DESCRIPTION	
	SS/01	Simple Set reader and 2 programmed keyfobs	
	SS/F	Simple Set keyfob	
	SS/OPTKIT/M	Optima G3 Compact with Simple Set reader and 2 keyfobs	
	SS/ACCKIT/M	Accenta G3 Mini System with Simple Set reader and 2 keyfobs	

FULLY COMPATIBLE CONTROL PANELS AND ACCESSORIES			
LIST NUMBER	DESCRIPTION	LIST NUMBER	DESCRIPTION
8EP395	Optima G3	8SP400	Accenta G3 Mini
8EP396	Optima G3 Compact	8EP219	Accenta LED Remote Keypad
8SP401	Accenta G3	8EP332	Accenta LCD Remote Keypad

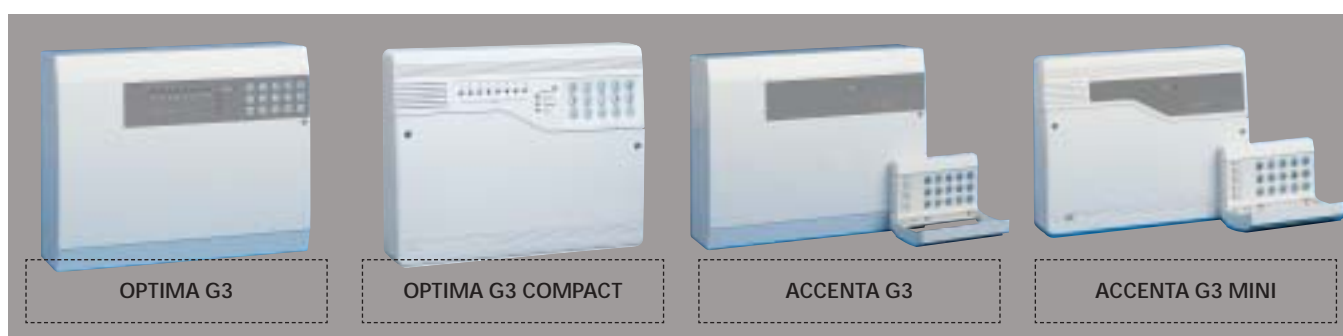

ADE

The Arnold Centre Paycocke Road Basildon Essex SS14 3EA United Kingdom		Technical Helpline Tel 01268 563720
Customer Service Tel 01268 563000	Literature Helpline Tel 0870 240 3387	E-mail ade_technical@novar.com
Customer Service Fax 01268 563563	Literature Helpline Fax 0870 240 3386	Website www.ade.co.uk
Registered Office: Novar House 24 Queens Road Weybridge Surrey KT13 9UX Registered No. 189291		Literature Ref: ADE/03-04-02/008

