



BOSCH

Invented for life

Blue Line Gen2 Quad PIR Motion Detector (12 m [40 ft] coverage)



- ▶ **Dynamic Temperature Compensation** – superior catch performance in any environment
- ▶ **Wall to Wall Coverage** – superior catch performance
- ▶ **Flexible Mounting Height, No Adjustments** – reduce installation time and false alarms, improve catch performance
- ▶ **Self-locking Enclosure with Integrated Bubble Level** – reduce installation time

The Blue Line Gen2 Quad PIR Detector (ISC-BPQ2-W12) uses two individual sensors that operate like two PIRs in one detector. Each sensor processes signals separately. Both must activate to generate an alarm signal. This improves false alarm immunity relative to a standard PIR, because false alarm sources such as noise spikes and small animals are ignored.

Quad detectors also provide superior catch performance versus a standard PIR or dual-technology detector. They are particularly well suited for challenging installation situations; for example, cases where cross catch of intruders cannot be guaranteed or where intruders are able to cross the detection pattern very quickly.

Functions

First Step Processing (FSP)

First Step Processing (FSP) almost instantly responds to human targets without producing false alarms from other sources. FSP adjusts the detector's sensitivity based on signal amplitude, polarity, slope, and timing. This eliminates the need for the installer to select the sensitivity level, thus improving ease of installation and reliability.

Dynamic Temperature Compensation

The detector intelligently adjusts its sensitivity to maintain its ability to identify human intruders at virtually any temperature.

Wall-to-Wall Coverage

An improved lookdown zone and coverage range of 12 m x 12 m (40 ft x 40 ft) provide wall-to-wall coverage.

Self-locking Enclosure

The sliding self-locking enclosure has an integrated bubble level and custom gap-free, lift-gate style terminal blocks to make installation easier.

Sealed Optics and Electronics

The optics and electronics are assembled into the front enclosure and sealed with a protective cover to prevent damage during installation. The sealed optical chamber also prevents drafts and insects from affecting the detector.

Test Features

Externally visible alarm LED can be disabled after installation.

Certifications and Approvals


| Region | Certification |
|-----------------|-----------------------------------------------------------------------------------------------------------------------|
| Europe | CE 2004/108/EC: EMC Directive and 2006/95/EC: Low-Voltage Directive |
| | CERTALA RM EN50131-2-2 [-W12] |
| Belgium | INCERT B-509-0051/b |
| Norway | FG GODKJENNELSESBEVIS [-W12] |
| USA | UL cULus - ANSR: Intrusion-detection Units (UL 639), ANSR7: Intrusion-detection Units Certified for Canada (ULC-S306) |
| France | AFNOR 2620200002A0 [-W12] |
| Sweden | INTYG 11-267 [-W12] |
| the Netherlands | NCP 2011062 [ISC-BPR2-w12, -WP12, ISC-BPQ2-W12, ISC-BDL2-W12G, ISC-BDL2-WP12G, ISC-BDL2-WP6G] |

This detector is also designed to comply with the following:

- Europe Complies with EN50131-2-2 Grade 2
- Complies with EN50130-5 Class II
- Complies with EN60529, EN50102 (IP30, IK04)
- Complies with Directive 2002/95/EC - Restriction of the use of certain Hazardous Substances (RoHS)

Installation/Configuration Notes

Coverage Patterns

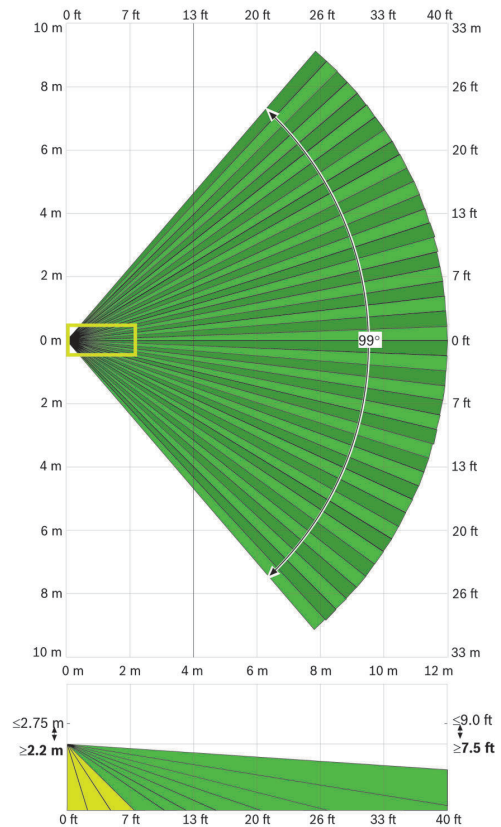

12 m x 12 m (40 ft x 40 ft) coverage

Mounting

The recommended mounting height is 2.2 m to 2.75 m (7.5 ft to 9 ft) with no adjustments required.

The detector can be mounted:

- On a flat wall (surface, semi-flush), with the optional B335 Swivel-mount Bracket, or with the optional B328 Gimbal-mount Bracket.
- In a corner (the junction of two perpendicular walls).
- On the ceiling with the optional B338 Ceiling-mount Bracket.

Parts Included

| Quant. | Component |
|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Detector |
| 1 | Hardware pack <ul style="list-style-type: none"> • 2 anchors (#6, #8 x 7/8) • 2 screws (#6 x 1.25) • 1 cable tie (2.5 mm) |
| 1 | Literature - Installation Instructions |

Technical Specifications

Electrical

Current (alarm/standby): 10 mA at 12 VDC

Voltage (operating): 9 VDC to 15 VDC

Environmental

Environment: Complies with EN50130-5 Class II

Relative Humidity: 0 to 95%, non-condensing
*For UL Listed product installations,
 0 to 85%, non-condensing*

Temperature (operating): -30°C to +55°C (-20°F to +130°F)
*For UL Listed product installations, 0°C to
 +49°C (+32°F to +120°F)*

Mechanical

Color: white

Dimensions: 105 mm x 61 mm x 44 mm
 (4.2 in. x 2.4 in. x 1.7 in.)

Material: High-impact ABS plastic

Radio Frequency Interference (RFI) Immunity: No alarm or setup on critical frequencies in the range from 150 kHz to 2 GHz at field strengths less than 30 V/m.

Outputs

Relay: Solid state, supervised, Form A normally-closed (NC) contacts rated for ≤ 100 mA, 25 VDC, 2.5 W, $< 20 \Omega$ closed

Tamper: Normally-closed (NC) contacts (with cover on) rated for ≤ 100 mA, 25 VDC, 2.5 W
 Connect tamper circuit to 24-hour protection circuit.

Ordering Information

Blue Line Gen2 Quad PIR Motion Detector (12 m [40 ft] coverage) **ISC-BPQ2-W12**

Uses two individual sensors that operate like two PIRs in one detector

Americas:
Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

Represented by